



Roma



Spandek

ECOLITE

Made From Recycled PET Bottles



ECONOMICAL



**ECO
FRIENDLY**




**UV
PROTECTION**

Installation


1

Minimum 10° slope, so that rainwater is completely drained

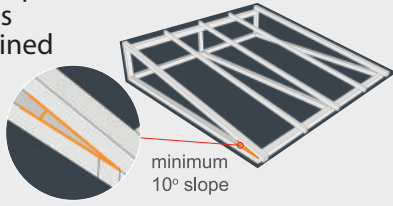

2

Recommended 200 mm sheet length overlap, 100 mm overhang length, & 600 mm maximum purlin distance

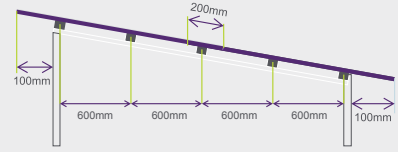

3

Recommended 1 corrugation overlap on either sides



Standard Specification

Profile	Color	Length
Roma	Clear	1.8 - 2.1 - 2.4 - 3.0




Product	Thickness (mm)	Width (mm)	Effective Width (mm)
Ecolite	0.6	800	730
	0.8	800	730
	1.0	800	730
	1.2	800	730

Product	Thickness (mm)	Width (mm)	Effective Width (mm)
Ecolite	1.0	1050	1000
	1.0	830	760

Profile	Color	Length
Spandek	Clear	3 - 4 - 5 - 6

Product	Thickness (mm)	Width (mm)	Effective Width (mm)
Ecolite	1.0	1050	1000
	1.0	830	760

Product	Thickness (mm)	Width (mm)	Effective Width (mm)
Ecolite	1.0	1050	1000
	1.0	830	760

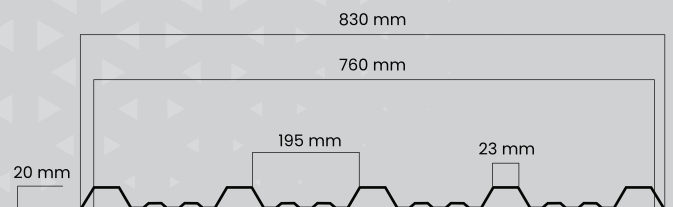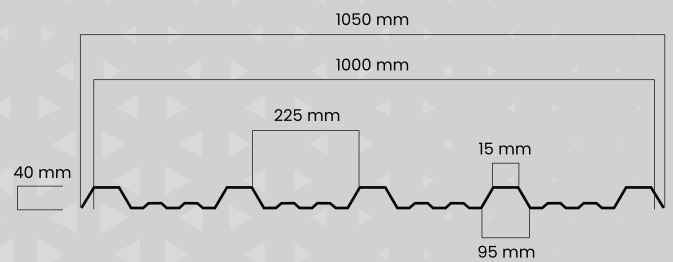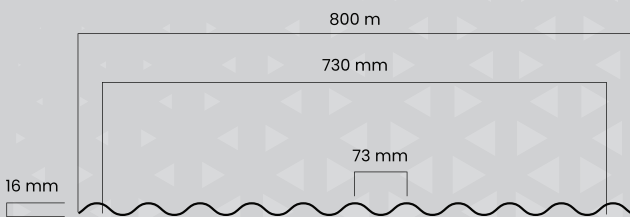

ECOLITE
 Made From Recycled PET Bottles